


# DEMONSTRATION FOR USING THE **STOP & GO** POCKET TIRE PLUGGER




1 Locate puncture and remove damaging item




2 Use probe tool to inspect damage

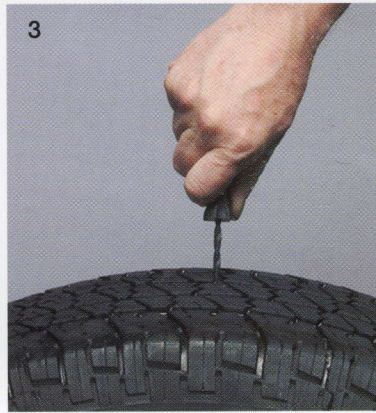


3 Thoroughly ream out hole with rasp tool

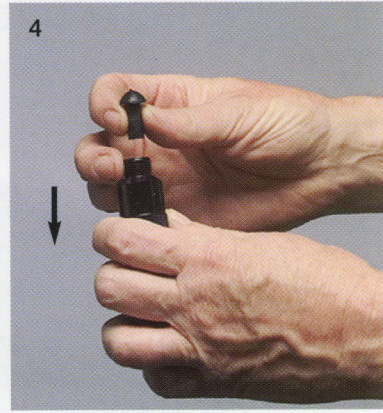


4 Set mushroom plug into Plugger with stem down

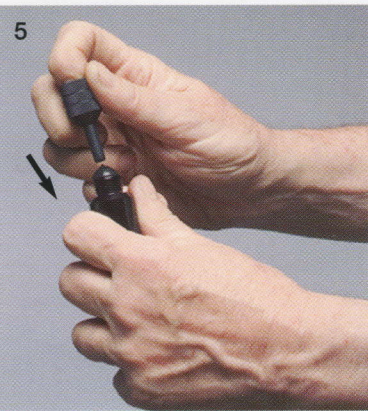


5 Use nozzle to recess mushroom head down into Plugger

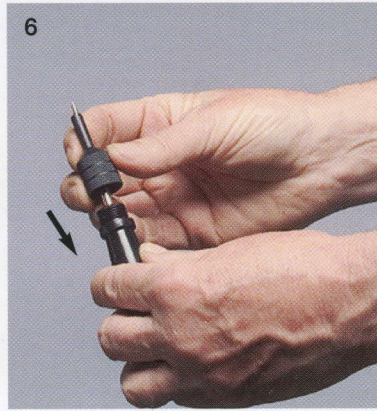


6 Slide nozzle over probe tool and screw down

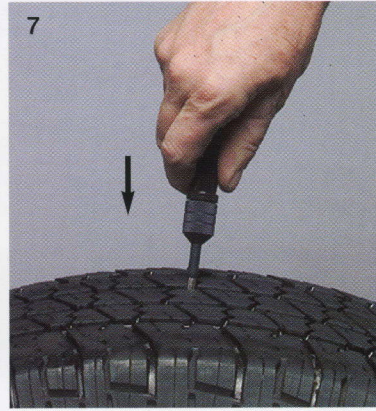


7 Insert probe and nozzle into the hole then unscrew probe from nozzle

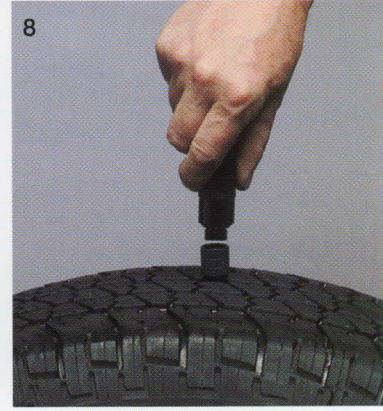


8 Screw loaded Plugger onto nozzle in tire

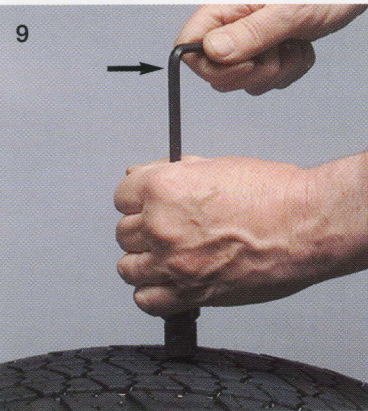


9 Insert hex wrench into bottom of Plugger and turn clockwise until it stops

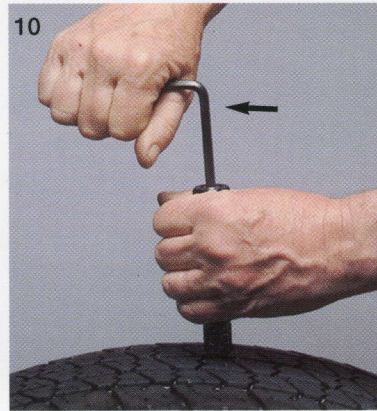

10 Then turn counter-clockwise until inner rod returns to bottom of Plugger

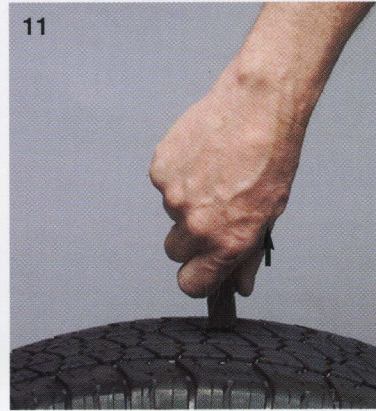


11 Pull Plugger and nozzle away from tire

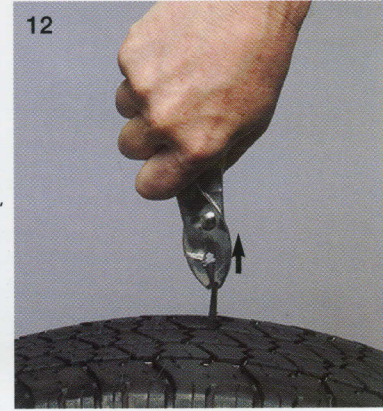

12 Use pliers to stretch the stem back toward you 2 inches



13 Inflate tire to full pressure and then trim stem at tread level

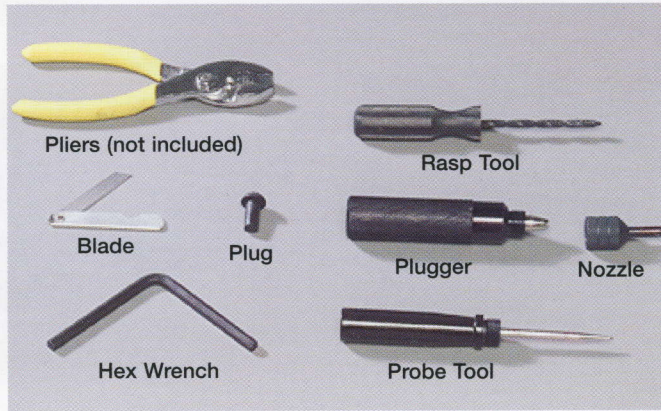

International Inc.  
 3610 Thunderbird Lane  
 Crystal Lake, IL. 60012-2089 USA  
 Call Toll-Free 800 747-0238  
 Phone: 815-455-9080  
 Fax: 815-455-9210

[info@stopngo.com](mailto:info@stopngo.com)  
[www.stopngo.com](http://www.stopngo.com)